


Technical Information 技术信息

SHOOTBOLT-DIMENSION 插销-尺寸



Combined corner
keep size 1 & 2
扣板

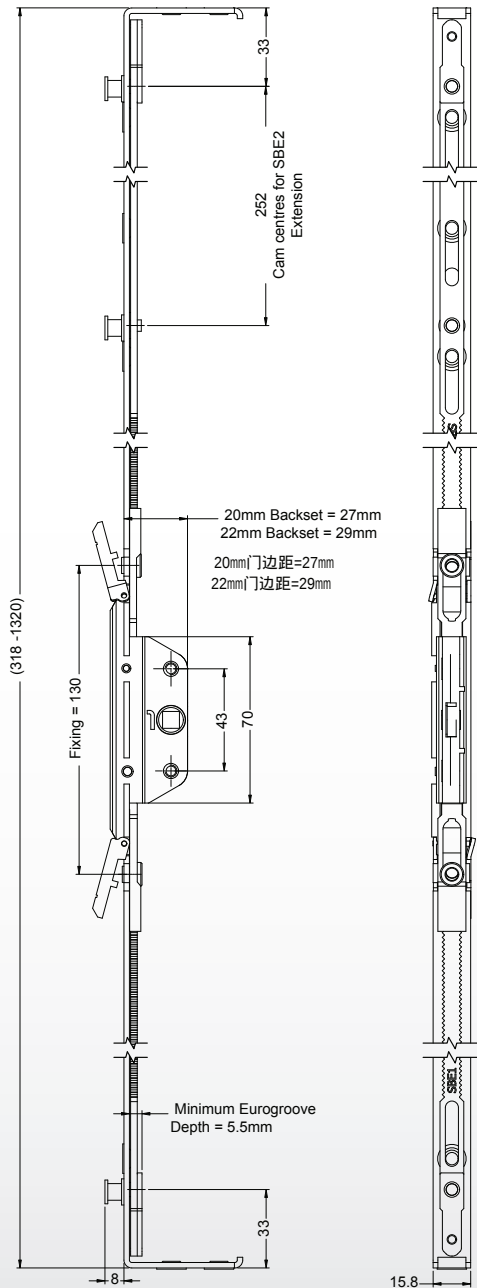

Intermediate keep 扣板
size 2 only



NEW
strengthened
shoot
加固件

PROFILE 窗型	KEEP LH 左扣板	KEEP RH 右扣板	MUSH-ROOM KEEP 扣板
DIPLOMAT INT TRANSOM	SO21A	SO23A	SO22A
DURAFLEX DIAMOND	SO11A	SO10A	SO12A
EUROCELL 60mm	SO16C	SO17C	SO18C
EUROCELL ULTIMATE 70	SO33A	SO34A	SO35A
EUROCELL LOGIK	SO72A	SO73A	SO71A
EUROCELL LOGIK OVALO	SO72A	SO73A	SO71A
KBE MAVINE 58mm	SO49A	SO51A	SO50A

PROFILE 窗型	KEEP LH 左扣板	KEEP RH 右扣板	MUSH-ROOM KEEP 扣板
PLASTMO INDEX 70mm	SO36A	SO37A	SO38A
PLASTMO INDEX VOGUE	SO36A	SO37A	SO38A
REHAU S706	SO36A	SO37A	SO38A
REHAU S706 INTEGRAL	SO26A	SO30A	SO27A
SELECTA ADVANCE 70	SO26A	SO30A	SO27A
SYNSEAL SHIELD	SO21A	SO23A	SO22A
SYNSEAL SYNERJY	SO80A	SO81A	SO82A

- New Trivalent silver finish
- Easy fit eurogroove mounted window shootbolt system tested to BS7950:1997
- Fits window sash rebate sizes 318mm to 1320mm
- Eurogroove fit (5.5mm minimum depth)
- 20mm & 22mm gearbox backset sizes
- New strengthened shoot
- 新三价铬钝化银白色镀锌
- 安装于欧式窗槽，符合BS7950:1997标准
- 适用于窗扇尺寸318mm到 1320mm
- 适合于欧标窗扇（最小5.5mm深）
- 20mm & 22mm门边距
- 新设计加固件

Technical Information

Performance: Endurance tested to 25,000 operations

Corrosion resistance: Meets requirements of BS EN 1670:

1998 Grade 3

技术要求

2.5万次安全可靠测试

表面符合BSEN 1670 3级标准

Material Specifications

Face Rail: Steel C1008

Gearbox Body and Connectors: Zinc BS1004A

Coating Details: Steel/trivalent silver

材料规格

主传动配件：C1008

齿轮箱：锌合金

表面处理：电三价铬彩锌

Additional Information 其它信息

Box Quantity: 10 units 10个/盒



PRODUCT CODES 产品选项			
COMPONENT DESCRIPTION	WINDOW SIZES	PRODUCT CODE*	QTY
GEARBOX SIZE 1	20MM BACKSET	SBGB4(T)	1
GEARBOX SIZE 2	22MM BACKSET	SBGB5(T)	1
EXTENSION SIZE 1	318-820 SASH REBATES	SBE1(T)	2
EXTENSION SIZE 2	821-1320 SASH REBATES	SBE2(T)	2

* For Trivalent silver finish add a "T" to the end of the product code

三价格电镀银须在编号后面加上"T"