


## Technical Information 技术信息

## ACTIVE COMPRESSION FRICTION STAY-DIMENSIONS

## 弹性标准型窗撑-尺寸规格

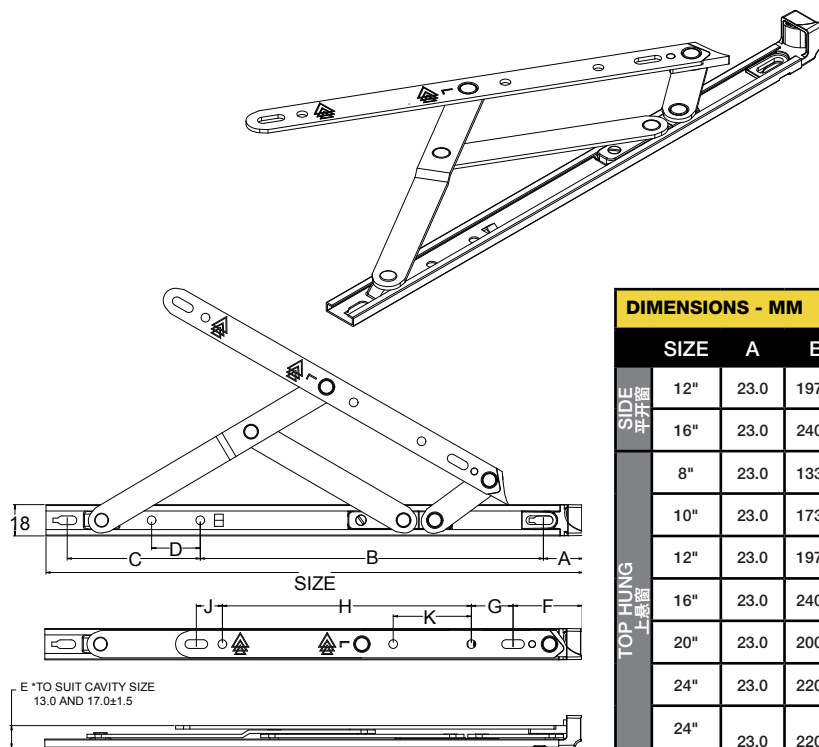

| DIMENSIONS - MM |           | 尺寸规格 - MM |       |       |       |       |      |      |       |       |       |
|-----------------|-----------|-----------|-------|-------|-------|-------|------|------|-------|-------|-------|
|                 | SIZE      | A         | B     | C     | D     | E     | F    | G    | H     | J     | K     |
| SIDE<br>平开窗     | 12"       | 23.0      | 197.5 | 76.5  | 76.5  | 13/17 | 40.0 | 59.0 | 108.5 | 15.0  | -     |
|                 | 16"       | 23.0      | 240.5 | 134.0 | 66.5  | 13/17 | 40.0 | 24.0 | 198.0 | 24.0  | 94.5  |
| TOP HUNG<br>上悬窗 | 8"        | 23.0      | 133.5 | 42.0  | -     | 13/17 | 41.5 | 12.0 | 95.5  | 15.0  | -     |
|                 | 10"       | 23.0      | 173.5 | 52.0  | -     | 13/17 | 41.0 | 24.0 | 112.5 | 15.0  | -     |
|                 | 12"       | 23.0      | 197.5 | 76.5  | 28.0  | 13/17 | 40.0 | 24.0 | 143.5 | 15.0  | 45.0  |
|                 | 16"       | 23.0      | 240.5 | 134.5 | 66.5  | 13/17 | 40.0 | 24.0 | 198.0 | 24.0  | 94.5  |
|                 | 20"       | 23.0      | 200.5 | 274.5 | 136.5 | 13/17 | 40.0 | 24.0 | 246.0 | 24.0  | 128.0 |
|                 | 24"       | 23.0      | 220.5 | 354.5 | 166.5 | 13/17 | 40.0 | 24.0 | 189.0 | 131.0 | -     |
|                 | 24"<br>HD | 23.0      | 220.5 | 354.5 | 166.5 | 13/17 | 40.0 | 24.0 | 189.0 | 131.0 | 95.0  |

## PRODUCT CODES 成品代码

|                  | PART NO.<br>成品代码 | STACK HEIGHT<br>窗撑叠高 |      | SIZE<br>窗撑规格 (英寸) | OPEN ANGLE (°)<br>打开角度 | MAX WEIGHT<br>窗最重 (KG) | MAX VENT SIZE<br>(MM) W X H<br>窗户规格 (宽 高) | BOX QTY<br>包装 (对/箱) |
|------------------|------------------|----------------------|------|-------------------|------------------------|------------------------|-------------------------------------------|---------------------|
|                  |                  | 13mm                 | 17mm |                   |                        |                        |                                           |                     |
| SIDE HUNG<br>平开窗 | ASH12P           | √                    |      | 12                | 60                     | 22                     | 600 X 1200                                | 50                  |
|                  | AHSH12P          |                      | √    | 12                | 60                     | 22                     | 600 X 1200                                | 40                  |
|                  | ASH16P           | √                    |      | 16                | 60                     | 24                     | 650 X 1200                                | 25                  |
|                  | AHSH16P          |                      | √    | 16                | 60                     | 24                     | 650 X 1200                                | 20                  |
| TOP HUNG<br>上悬窗  | ATH08P           | √                    |      | 8                 | 60                     | 12                     | 1200 X 350                                | 50                  |
|                  | AHTH08P          |                      | √    | 8                 | 60                     | 12                     | 1200 X 350                                | 40                  |
|                  | ATH10P           | √                    |      | 10                | 70                     | 14                     | 1200 X 400                                | 50                  |
|                  | AHTH10P          |                      | √    | 10                | 70                     | 14                     | 1200 X 400                                | 40                  |
|                  | ATH12P           | √                    |      | 12                | 60                     | 16                     | 1200 X 550                                | 50                  |
|                  | AHTH12P          |                      | √    | 12                | 60                     | 16                     | 1200 X 550                                | 40                  |
|                  | ATH16P           | √                    |      | 16                | 60                     | 20                     | 1200 X 800                                | 25                  |
|                  | AHTH16P          |                      | √    | 16                | 60                     | 20                     | 1200 X 800                                | 20                  |
|                  | ATH20P           | √                    |      | 20                | 40                     | 24                     | 1200 X 900                                | 25                  |
|                  | AHTH20P          |                      | √    | 20                | 40                     | 24                     | 1200 X 900                                | 20                  |
|                  | ATH24P           | √                    |      | 24                | 40                     | 27                     | 1200 X 1000                               | 25                  |
|                  | AHTH24P          |                      | √    | 24                | 40                     | 27                     | 1200 X 1000                               | 20                  |
|                  | ATH24PHD         | √                    |      | 24                | 40                     | 35                     | 1200 X 1200                               | 25                  |
|                  | AHTH24PHD        |                      | √    | 24                | 40                     | 35                     | 1200 X 1200                               | 20                  |



- 0 A complete range of top & side hung variants
- 0 Lifetime Guarantee\*
- 0 Uniquely fitted end cap with an active compression spring to give the ultimate seal every time the window is used offering trouble free installation
- 0 BBA Approved
- 0 13 & 17mm stack heights suitable for all popular profiles
- 0 可提供一系列完整的上悬型及平开型窗撑。
- 0 可靠的使用寿命保证。
- 0 尾塞独特的可压缩弹性设计,使窗户在每次开关时都能更好的密封和稳固。
- 0 通过BBA。
- 0 窗撑总叠加高度13及17mm, 适合所用流行的窗型。

## Technical Information 技术信息

### Assessment Data

**Performance:** cycle tested to over 25,000 operations and tested to BS 6375 Pt.1:2004 & Pt 2:1987

**Corrosion resistance:** meets requirements of BS EN 1670:1998 grade 5

### 数据评估

**功能:**循环测试通过超 25,000 转。  
并满足 BS 6375 Pt.1:2004 & Pt 2:1987 的要求。  
**耐腐蚀性:**符合 BS EN1670:1998 等级5的标准。

### Material Specifications

**Track, link and rivets:** 430 grade stainless steel (ref BS1449 Part 2:1991)

**Metal End Cap:** Zinc BS1004A


**Plastic Components:** Glass reinforced Nylon

### 原材料说明

导轨件、连杆及铆钉:采用不锈钢。

金属尾塞: 锌合金。

塑胶配件: 采用尼龙加玻璃纤维。

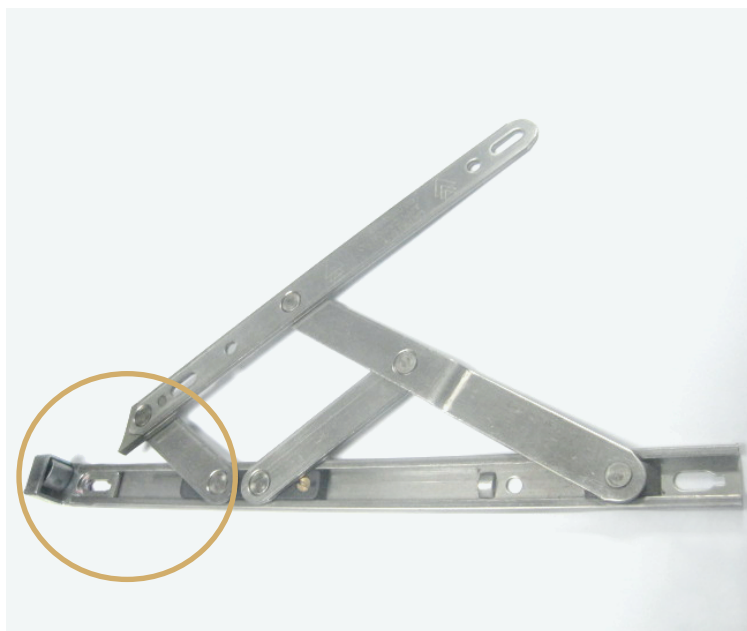

With its Active Compression Technology (ACT), the new Phocas friction stay ensures accurate installation and realignment of the sash and frame, to create the perfect seal with peace of mind and ease of fabrication.

因为它的弹性可压缩功能, 确保这款窗撑能与窗框紧密的配合, 这种令人心怡的设计结构可实现窗与框的完美的闭合。